




GODZILLA U-231

FORD GODZILLA APPLICATIONS

INTAKE DURATION @.050"	231 °	ROCKER ARM RATIO	1.8 :1
EXHAUST DURATION @.050"	24X °	NET LIFT INTAKE	0.663 "
LOBE LIFT INTAKE	0.368 "	NET LIFT EXHAUST	0.663 "
LOBE LIFT EXHAUST	0.368 "	LOBE SEPARATION ANGLE	110 °
INTAKE LOBE LIFT @ T.D.C.	0.095 "		

REV.1

CAM SKU: BTR-GZ231							SEE TIMING CHAIN DIAGRAM ON REVERSE SIDE						
VVT LIMITER REQUIRED:			BTR-VVT-GZ-8CAM				ACTUAL SPECS MAY VARY*						
VVT TARGET TABLE (HolleyEFI Style)													
RPM	4400	4600	4800	5000	5200	5400	5600	5800	6000	6200	6400	6600	6800+
VVT CRANK DEG	0.25	0.25	0.25	0.25	0.25	1.0	3.0	4.0	6.0	7.0	8.0	8.0	8.0

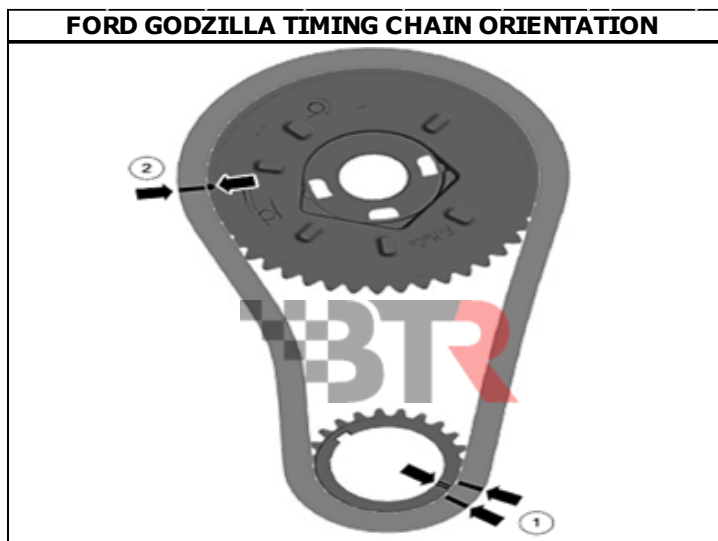

IMPORTANT NOTE:

BE SURE TO THOROUGHLY CLEAN CAMSHAFT, INCLUDING THE CENTER, AND APPLY ASSEMBLY LUBE BEFORE INSTALLATION



FOR MORE SPECS AND TECHNICAL INFO SCAN THE QR CODE OR VISIT:

BRIANTOOLEYRACING.COM/TECHNICAL